


Project L

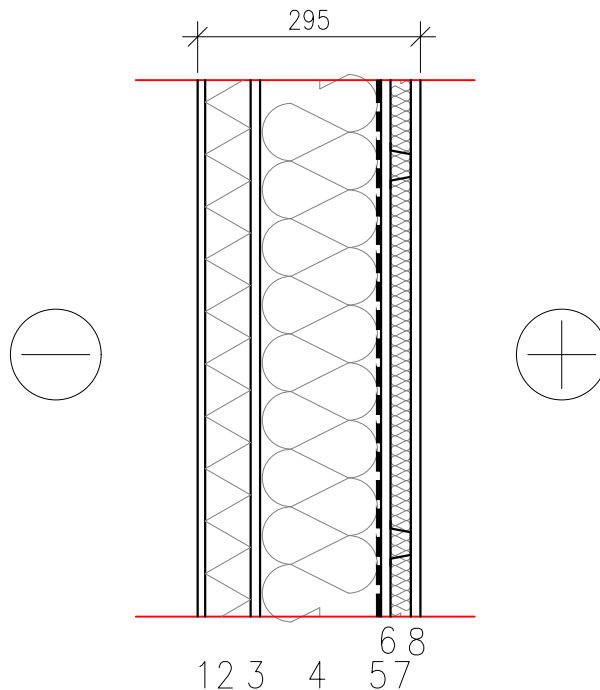

1	Plastering Filzputz, Körnung 1,5mm, z.B Keim 9436	10mm	0.02kN/m2
2	Exterior facade insulation Tektafan A2-FP/HB	60 mm	0.06kN/m2
3	Gypsum board m' >= 12 kg/m2 Knauf Diamant	12.5 mm	0.12kN/m2
4	Wooden frame 60x160 cc625 +Mineral wool λD=0,034 W/(m·K), 15..20kg/m3 Knauf MineralPlus HB 034	160 mm	0.10kN/m2 0.03kN/m2
5	Water vapor barrier	0.25 mm	0.01kN/m2
6	Gypsum board m' >= 12 kg/m2 Knauf Diamant	12.5 mm	0.12kN/m2
7	Horizontal spring rails cc500 Knauf Federschiene 60/27/06 + Acoustic mineral wool 30mm AKUSTIK-DÄMMPLATTE TP 120 A	27 mm	0.02kN/m2 0.02kN/m2
8	Gypsum board m' >= 12 kg/m2 Knauf Diamant	12.5 mm	0.12kN/m2

Self-weight: 0.71 kN/m2

This structural type is based on KNAUF W551.de